

FEATURES


- * ALL WELDED COSTRUCTION
- * WATTAGES FROM 250 WATTS TO 1000 WATTS
- * RANGE FROM OR1 TO 7R5
- * SUITABLE FOR HIGH CURRENTS
- * AVAILABLE AS A BANK
- * CUSTOM BASED DESIGNS ALSO AVAILABLE




CHARACTERISTICS

Tolerance	±5% & ±10%
Temperature coefficient	150PPM/°C - 900ppm/°C
Power dissipation	Rated at 40°C ambient and derate linearly to 0 power at 375°C
RCWV	$\sqrt{\text{Rated power} \times \text{resistance value}}$ (RCWV - Rated Continuous Working Voltage)

DIMENSIONS(mm)

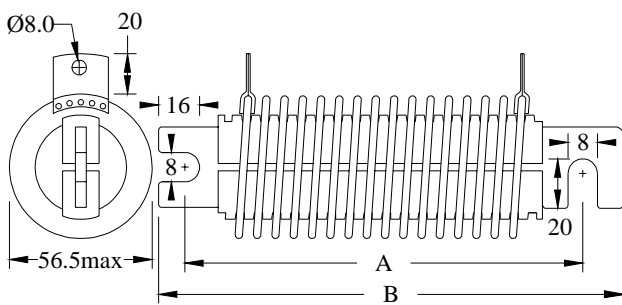

DERATING CURVE

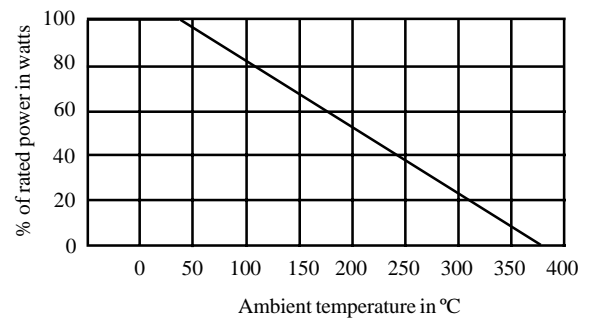

TECHNICAL SPECIFICATIONS

Type no.	Watts at 40°C	Ohmic range		Mechanical dimensions(mm)	
		Min	Max	A±1	B±0.5
VEW250	250	0R1	1R8	168	190
VEW500	500	0R2	3R6	280	302
VEW750	750	0R3	5R6	392	414
VEW1000	1000	0R4	7R5	504	526